


TECHNICAL SPECIFICATIONS

Harness 5pt., QCB, Padded Back and Legs, Back D-Ring, Side D-Rings with Positioning Belt, Black Color.

5 point adjustable harness, QCB, padded back sewn in, QCB padded legs. 3 D-rings. Fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

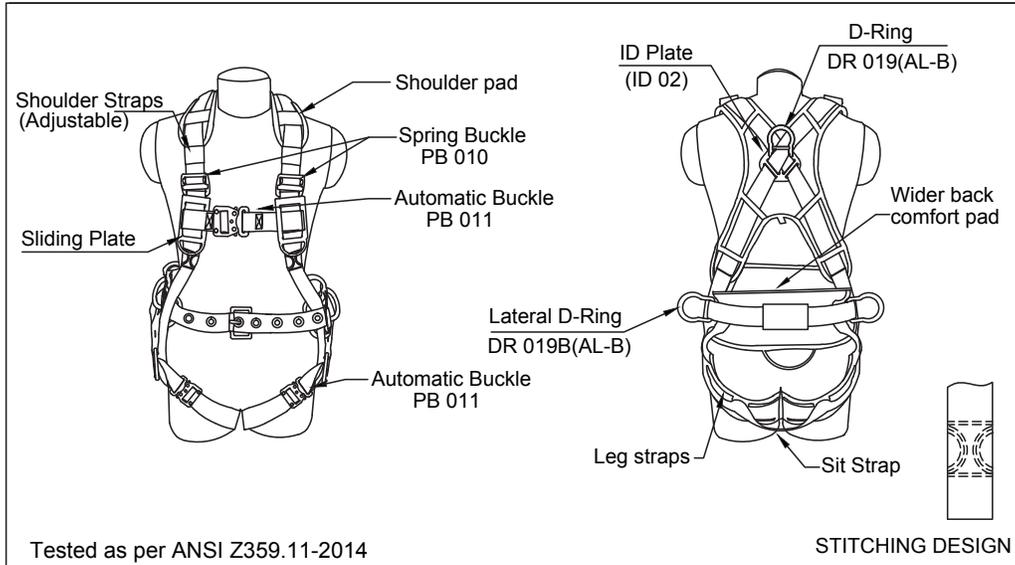

USER CAPACITY:

- 130 – 310 lbs. (59 -140 kg)

DESIGN:

- Dorsal D-ring for fall arrest.
- Adjustable shoulder straps for easy adjustment and snug fitting.
- Adjustable leg straps for snug fitting.
- Two lanyard keepers have been incorporated to store unused leg of the lanyard.
- Equipped with work positioning belt.
- Equipped with two side D-rings for work positioning.

WEBBING: Material: Polyester | Width: 1.73 in. ± 0.04 in. | Breaking Strength: 5000 lbs.

STITCHING THREAD:

Material: High-tenacity polyester

METAL COMPONENT:

Material: Alloy Steel
 Finish: Silver or Golden Yellow Galvanized

D-RING: Material: Aluminum Alloy | Finish: Natural Silver Polished or Powder Coated

VITAL TEST COMPLIANCE:

Static Strength: 3600 lbs. for 1 Minute at attachment element.
 Dynamic performance: Free fall from 6 feet height done to a test dummy weighing 220.46 lbs. at dorsal attachment element. Harness should not release the dummy for 5 minutes (Retention time).

WEIGHT OF HARNESS:

5.89 lbs. ± 0.02 lbs.