




TECHNICAL DATA SHEET

DESCRIPTION

Dayton Superior A58 Sure Plugs are made from PVC soft vinyl.

APPLICATION

A58 Sure Plugs are used to plug holes left after taper tie removal.

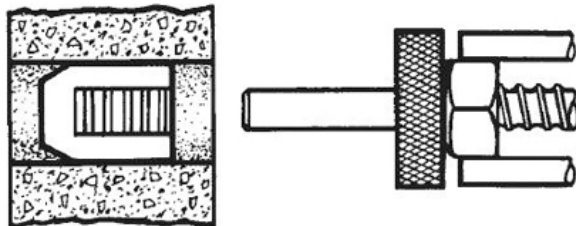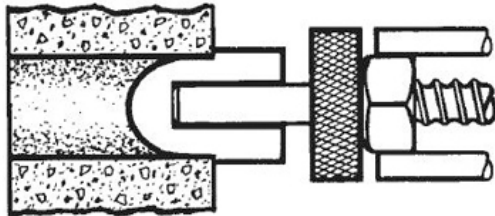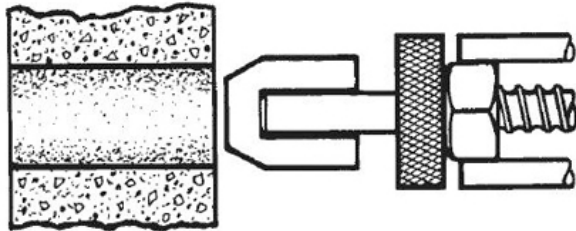

FEATURES

- A58 Sure Plug should be installed ONLY with the A59 Insertion Tool
- Depending on how the A59 insertion tool is adjusted, it will install the plug either flush to the surface or approximately a 1-1/2" maximum depth
- Plug is gray color to blend with concrete
- It may be positioned flush with the concrete face, or recessed, depending on the architectural effect desired
- When recessed, the sure plugs may also serve as backing for flush or recessed grouting

- Ribs inside the plug are designed to anchor the grout
- A58 Sure Plug is not intended to be installed to the center of the wall and any attempts to do so can, in most cases, rupture the plug

INSTALLATION

1. The Sure Plug is easily pushed into a hole the specified depth by using the A59 insertion tool.
2. Pushing against the bottom of the blind center hole of the plug forces the plug's oversize body to elongate as it enters the hole.
3. When the pushing force is stopped, the plug elastically returns towards its original diameter creating a high radial pressure against the walls of the hole.
4. When properly installed, the A58 Sure Plug will withstand a hydrostatic pressure equal to approximately a 277 ft. liquid head of water.
5. Test report is available on request.

RELATED PRODUCTS

- D9 Taper Ties

ORDERING INFORMATION

Product Code	Description	Weight
66800	11/16" X 1" #11	0.014 LB
66810	7/8" X 1-1/8" #14	0.029 LB
66820	1" X 1-1/4" #16	0.042 LB
66825	1-1/8" X 1-3/8" #18	0.054 LB
66830	1-1/4" X 1-3/8" #20	0.073 LB
66835	1-3/8" X 1-1/2" #22	0.093 LB
66840	1-1/2" X 1-1/2" #24	0.113 LB
122010	1-3/4" X 1-3/4" #28	0.166 LB
220423	1-7/8" X 1-5/8" #29	0.196 LB

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

TECHNICAL DATA SHEET**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.