


C60 Type 2 Pres-Steel Hanger

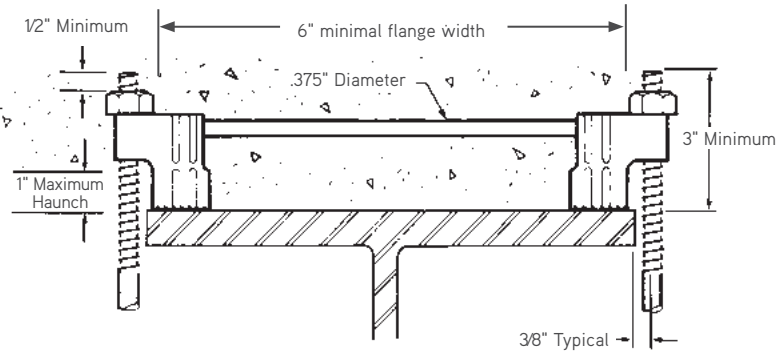

The Type 2 hanger is similar to the Type 1 hanger, except it is designed to be used where the deck has up to a 1" haunch. 1/8" maximum clearance between the edge of the beam and the 1/2" diameter coil bolts. To avoid decreasing the safe working load of the hanger, full bearing of the end clips is required. Hangers must be equally loaded on both sides to prevent formwork from tipping.

Safe Working Load
2,375 lbs. per Side

SWL provides a factor of safety of approximately 2 to 1.



WARNING: Hangers must be equally loaded on both sides.

To Order:
Specify: (1) quantity, (2) name, (3) flange width.

Example:
750 pcs. C60 Type 2 Pres-Steel Hanger for 12" Flange.

C60 Type 3 Pres-Steel Hanger

Designed for a 2-1/2" maximum haunch. Uses a corrugated strap to connect the end clips, which are bent outward to provide stability under load. 1/8" maximum clearance between the edge of the beam and the 1/2" diameter coil bolts.

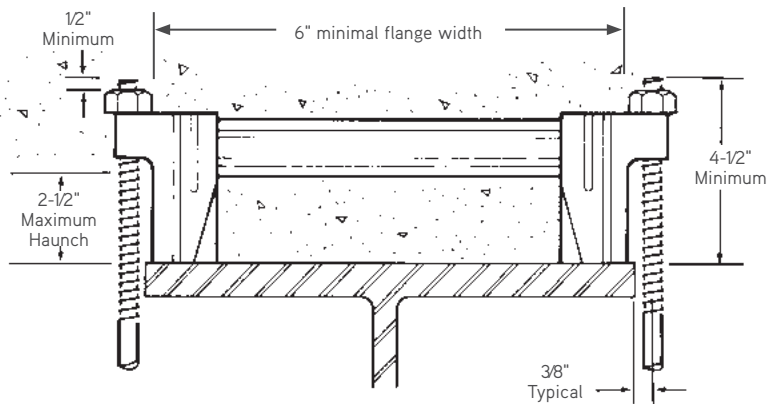

Safe Working Load
2,500 lbs. per Side

SWL provides a factor of safety of approximately 2 to 1.

WARNING: Hangers must be equally loaded on both sides.

To Order:
Specify: (1) quantity, (2) name, (3) flange width.

Example:
570 pcs. C60 Type 3 Pres-Steel Hanger for 18" Flange.