


TECHNICAL DATA SHEET

DESCRIPTION

A3 Heavy Snap Tie is manufactured with either hot or cold forged integral heads and is equipped with flats or crimps to prevent turning in the concrete during breakback operations. Coating the tie with wax will aid in breakback operation.

APPLICATION

Used for handset wood wall forming.

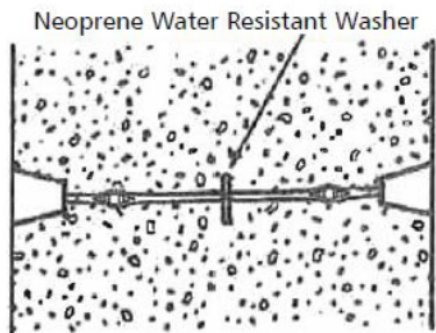

FEATURES

- 3,350 lbs. SWL that adds a safety factor of approximately 2 to 1
- Available in any length from 6" to 480"
- Available with plastic cone or metal spreader
- Can be manufactured with a tight fitting neoprene washer (5/8" O.D.x0.187" I.D.x 1/8" thick) located near the center of tie to eliminate water seepage along the tie

INSTALLATION

1. Drill holes in plywood 1/8" larger than the snap tie head (usually 5/8" diameter drill bit will be required)
2. Place the ends of snap ties through the holes in the plywood
3. Place the bracket (Jahn® "A", Jahn® "C" or Omni wedge) on the tie
4. The proper tie head position is at the midpoint or higher of the Omni wedge slot. Correct spacing between double wales is 5/8" to 3/4"
5. Jahn® "A" bracket is utilized to hold a single wale and can be installed before or after the wales have been positioned

RELATED PRODUCTS

- A2 Plastic Cone
- A16 Omni Wedge
- A81 Jahn® "A" Bracket
- A82 Jahn® "C" Bracket

HOW TO ORDER

Additional sizes and materials available made to order. Please call for availability, lead times and pricing.

ORDERING INFORMATION

SNAP TIE HEAVY - 1" X 1" PLASTIC CONE

Product Code	Description	Weight
16252	12" X 4-3/4" L&W	0.31 LB
144028	6" X 8-1/4" L&W	0.33 LB
16278	8" X 8-1/4" L&W	0.35 LB
16280	10" X 8-1/4" L&W	0.36 LB
16282	12" X 8-1/4" L&W	0.38 LB
16284	14" X 8-1/4" L&W	0.40 LB
16286	16" X 8-1/4" L&W	0.43 LB
16288	18" X 8-1/4" L&W	0.45 LB
16294	24" X 8-1/4" L&W	0.52 LB
144012	30" X 8-1/4" L&W	0.56 LB
144013	36" X 8-1/4" L&W	0.68 LB

MANUFACTURER

Dayton Superior Corporation
 1125 Byers Road
 Miamisburg, OH 45342
 Customer Service: 888-977-9600
 Technical Services: 877-266-7732
 Website: www.daytonsuperior.com

TECHNICAL DATA SHEET**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.