


TECHNICAL SPECIFICATIONS

Temporary 4-Person Rope HLL Lifeline

Horizontal Lifeline system. Covers span length of 15' to 100'. Min Breaking Strength 5620 lbs. Kernmantle rope of diameter 5/8". Comes complete with carabiners, rope tensioner and carrying bag. Conforms to ANSI Z359.1-2007.

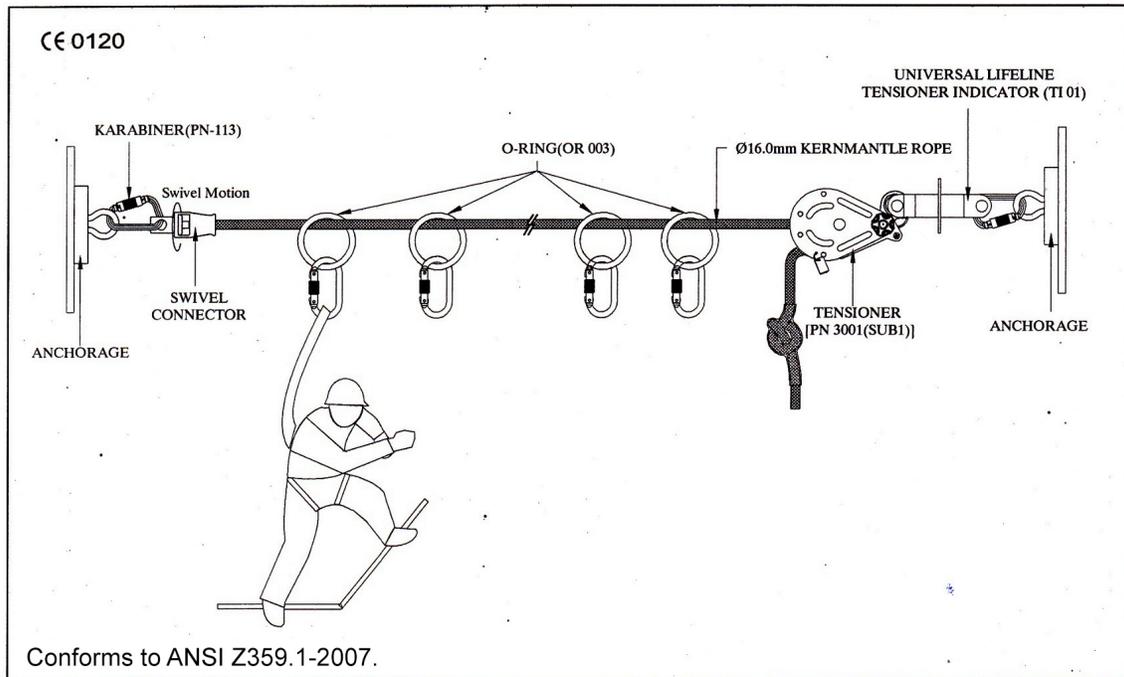

- DESIGN:**
- Temporary horizontal lifeline consisting of 0.63" diameter Kernmantle rope having a swivel brass connector at one end of the lifeline and a specially designed tensioner at the other end.
 - Provided with forged steel O Rings to be used as mobile anchors for the workers to connect to the lifeline permanently.

SPAN LENGTH: Minimum: 16.40 ft. | Maximum: 82.02 ft.

MATERIAL: O Ring: Forged alloy steel
 Tensioner: Aluminum alloy and stainless steel

MINIMUM BREAKING STRENGTH: 25 kN

SYSTEM WEIGHT: 20.46 lbs. ± 0.22 lbs.