


Pencil Rod

A forming solution for changing dimensions where fixed length ties are not practical

Rod Clamps are used with 1/4" Pencil Rod to tie lumber forming units together. The rod is "pinched" by a set screw or clamp at both ends. Rod Clamps have nail holes for waler attachment.

Pencil Rod is most commonly used in battered walls and foundation mats with changing dimensions. Pencil Rod is a simple forming solution when surface appearance and clean breakback are not essential.

Pencil Rod is available in a continuous coil of 600 feet or a bundle of 500 feet cut in 20' lengths.

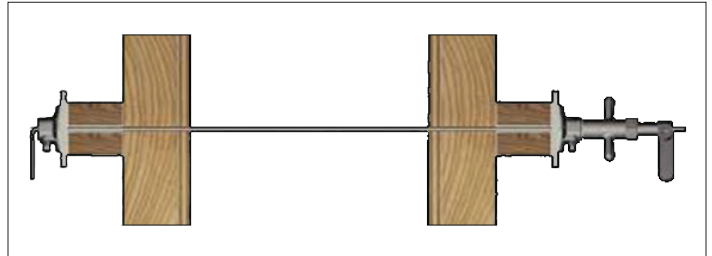

Pencil Rod and Rod Clamps ties formwork together and holds it securely during concrete placement.



Rod Clamp



Rod Puller



Quick Rod Clamp

| Pencil Rod | |
|------------|-----------------------------------|
| Part No. | Description |
| SBPR142C | Pencil Rod 1/4" - Coil (600 ft) |
| SBPR142B | Pencil Rod 1/4" - Bundle (500 ft) |
| SBRC14 | Rod Clamp 1/4" with Set Screw |
| SBQRC14 | Quick Rod Clamp 1/4" |
| SB14TW | Rod Puller/Tensioner 1/4" |